



Rev.	Description	Date
A0	New release	2017.02.15

1. PHYSICAL CHARACTERISTICS (mm)

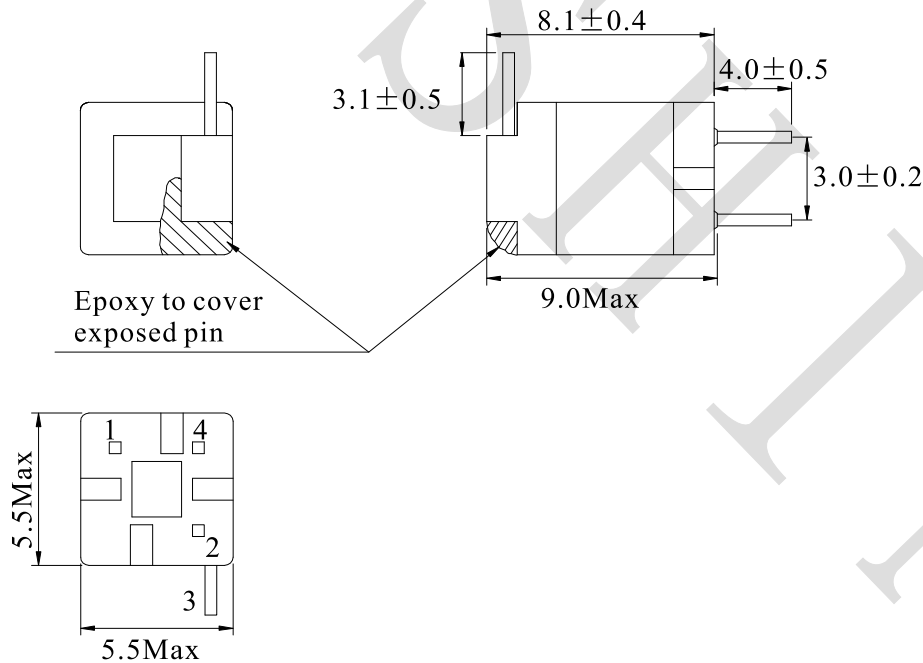

2. ELECTRONICAL SCHEMATIC

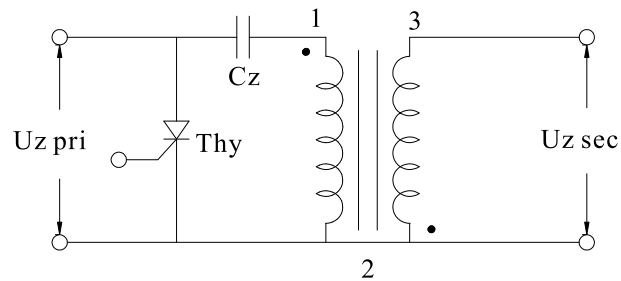

3. ELECTRONICAL SPECIFICATIONS

Pri resistance: $94 \pm 15 \text{ m}\Omega$

Pri voltage: 255V

Pri capacitance: 0.022uF

Pri inductance: $1.2 \pm 0.3 \text{ uH}@1\text{KHz}, 0.5\text{V}$

Sec resistance: $67 \pm 10 \Omega$

Sec voltage: 4.0KV Min

Sec inductance: $1.8 \pm 0.3 \text{ mH}@1\text{KHz}, 0.5\text{V}$

Operating temperature: -7°C to $+55^\circ\text{C}$

Test Instrument:

L: HP4284A

RDC: HM2540

NAME:	Trigger coil		
CUSTOMER P/N:		DATE:	2017-02-15
SHINHOM P/N:	TCB0609	REV:	A0
DRAWN BY	CHECKED BY	APPROVE BY	



SHINHOM
SHAANXISHINHOM ENTERPRISE CO LTD

The Document property belong to SHINHOM & is not allowed to be duplicated without authorization